



DATASHEET

F-YAY Installation cable

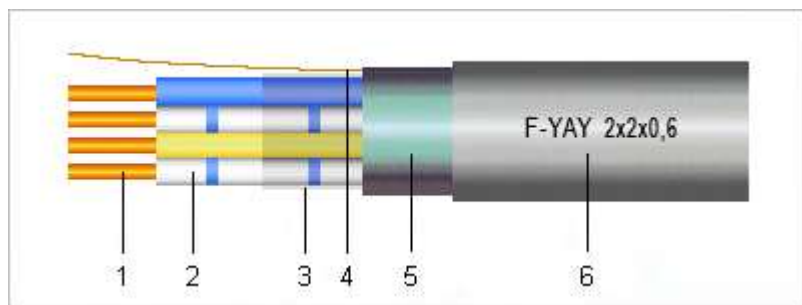

Structure

- > 1 Solid bare copper conductor
- > 2 PVC core insulation
- Cores twisted in pairs, pairs twisted in layers (*Twisting direction Z axis*)
 (*The 2-paired versions: star-quad cable design*)
- > 3 Polyester plastic (PET) foil wrapping over the cores
- > 4 Solid plain copper drain wire
- > 5 Polyester plastic-coated aluminium (AL/PET) foil electrostatic screening
- > 6 PVC outer sheath, gray colour RAL 7035 with imprint:
 "*F-YAY...x2x... Installation Cable, Lot number, Meter number*"

Dimensions

Conductor structure nominal	Outer Ø nominal [mm]	Conductor resistance at 20 °C [Ω/100m]	CU weight nominal [kg/km]	Weight approx. [kg/km]
2x2x0,6 mm	5,0	<69,5	13,0	36
3x2x0,6 mm	5,5	<69,5	19,0	56
5x2x0,6 mm	7,5	<69,5	30,0	60
6x2x0,6 mm	7,8	<69,5	36,0	70
10x2x0,6 mm	9,3	<69,5	59,0	100
20x2x0,6 mm	10,8	<69,5	115,0	170
2x2x0,8 mm	5,7	<39,0	21,0	50
3x2x0,8 mm	6,5	<39,0	32,0	60
5x2x0,8 mm	8,0	<39,0	52,0	85
6x2x0,8 mm	8,5	<39,0	62,0	105
10x2x0,8 mm	12,4	<39,0	103,0	170
20x2x0,8 mm	15,2	<39,0	203,0	320

DATASHEET

F-YAY Installation cable


Application










Installation cable is used in telecommunication systems, industrial networks, information processing systems, measurement, regulation and control applications with properties limiting the generation and spread of fire.


This cable is preferably used for indoor installation, but also in the open air for fixed installation on outer walls of buildings - provided it is protected against direct exposure to the sun.

Properties

- > Solid bare copper conductors, PVC insulated cores, AL/PET foil screening, PVC outer sheathed cable.
- > Cable is in accordance with standards:
 - EN 50575:2014 reaction to fire;
 - EN 13501-6 fire classification;
 - ÖVE-K 35 cable construction and core identification.
- > The special characteristic of this installation cable is the white cores made with blue, yellow, green and brown ring marking.

Pairs	1	2	3	4	5	6	7	8	9	10
Colours										

Pairs	11	12	13	14	15	16	17	18	19	20
Colours										

- > AL/PET foil electrostatic screening protects the transmission circuits against external electrical interferences. The drain wire is in contact with the inner aluminum surface of the foil.
- > The installation cable is REACH compliant as well as meeting the requirements of other legislation such as the RoHS Directive. The materials used in this cable are cadmium-free and contain no silicone and do not represent health hazards and minimize the environmental impact.
- > The product is conformed with the Low Voltage Directive (LVD) 2014/35/EU of the European Parliament and of the Council ensures that electrical equipment within certain voltage limits provides a high level of protection for European citizens.
- >  Product meets all the legal requirements for CE marking and can be sold throughout the European Economic Area (EEA).

Technical data

Peak working voltage:	300 V
Test voltage:	500 V eff. (Core/core, AC 50 Hz), 2000 V eff. (Core/screening, AC 50 Hz)
Temperature range:	Fixed installation -30 °C to +70 °C
Insulation resistance:	Min. 500 MΩ x km
Mutual capacitance:	At 800 Hz max. 100 nF / km
Minimum bending radius:	Fixed installation 7,5 x cable Ø

DATASHEET

F-YAY Installation cable

Packaging

In coil or drum.