


DATASHEET

EIB J-H(St)H Bus cable

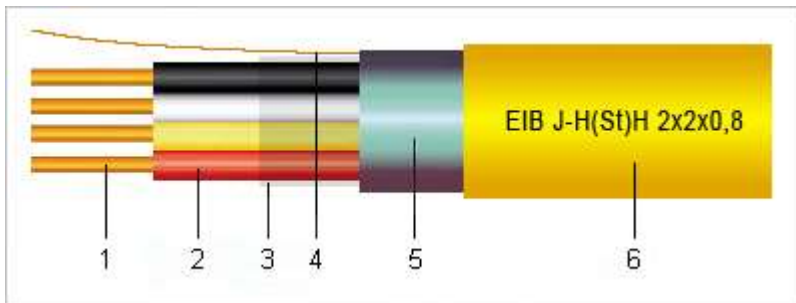

Structure

- > 1 Solid bare copper conductor
- > 2 Halogen-free polyolefin (FRNC) core insulation
Cores twisted in quad (Twisting direction Z axis)
- > 3 Polyester plastic (PET) foil wrapping over the cores
- > 4 Solid copper drain wire
- > 5 Polyester plastic-coated aluminium (AL/PET) foil electrostatic screening
- > 6 Halogen-free polyolefin (FRNC) outer sheath, yellow colour RAL 1003
with imprint:
"EIB J-H(St)H 2x2x0,8 Bus Cable, Lot number, Meter number"

Dimensions

Conductor structure nominal	Outer Ø nominal [mm]	Conductor resistance at 20 °C [Ω/100m]	CU weight nominal [kg/km]	Weight approx. [kg/km]
2x2x0,8 mm	6,2	<39,0	21,0	55

Application


Bus cable is used in the intelligent building system technologies, industrial networks, information processing systems, measurement, regulation and control applications in accordance with specifications EIB (European Installation Bus) / KNX standards with properties limiting the generation and spread of fire and smoke.

This cable is preferably used for indoor installation, but also in the open air for fixed installation on outer walls of buildings - provided it is protected against direct exposure to the sun.

DATASHEET

EIB J-H(St)H Bus cable

Properties

- > Solid bare copper conductors, flame retardant, non-corrosive (FRNC) polyolefin insulated cores, AL/PET foil screened, FRNC polyolefin outer sheathed cable.
- > Cable is in accordance with standards:
 - EN 50575:2014 reaction to fire;
 - EN 13501-6 fire classification;
 - DIN VDE 0815 cable construction and core identification.
- > The special characteristic of this bus cable is the outer sheath insulation test. *(During the test process all cores and screen connected together against outer sheath surface, immersed in water.)*
- > AL/PET foil electrostatic screening, sign of (St), protects the transmission circuits against external electrical interferences. The drain wire is in contact with the inner aluminum surface of the foil.
- > The bus cable is REACH compliant as well as meeting the requirements of other legislation such as the RoHS Directive. The materials used in this cable are cadmium-free and contain no silicone and do not represent health hazards and minimize the environmental impact.
- > The product is conformed with the Low Voltage Directive (LVD) 2014/35/EU of the European Parliament and of the Council ensures that electrical equipment within certain voltage limits provides a high level of protection for European citizens.
- >  Product meets all the legal requirements for CE marking and can be sold throughout the European Economic Area (EEA).

Technical data

Peak working voltage:	300 V
Operating voltage:	<120 V
Test voltage:	800 V eff. (Core/core, core/screening, AC 50 Hz) 2000 V (Water immersion test, 5 min.) 4000 V (Water immersion test, 1 min.)
Temperature range:	Fixed installation -30 °C to +70 °C
Insulation resistance:	Min. 100 MΩ x km
Mutual capacitance:	At 800 Hz max. 100 nF / km
Minimum bending radius:	Fixed installation 10 x cable Ø

Packaging

In coil or drum.